

PHOTOTRANSISTOR PRODUCTS SPECIFICATION

HPTB5-44D-B




Drawn by	Checked by	Approved by



DATE:2009/4/15

REV:E




HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Canng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

PACKAGE DIMENSIONS:




ABSOLUTE MAXIMUM RATINGS

TA=25°C

PARAMETER	SYMBOL	MAX. RATING	UNIT
Power Dissipation	Pd	150	mW
Sensitive Area	AA	0.19	mm ²
Collector-Emitter Voltage	Vceo	30	V
Emitter-Collector Voltage	Veco	5	V
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Dip Soldering Temperature (3mm from case Bottom 260 °C for 5 seconds)			

*Iron soldering in 350°C within 5 seconds will not cause damage to the dice. But be aware of the high temperature will not only make the epoxy soften but also cause the lead moving and the gold wire broken and even open. So before returning to the normal temperature PLEASE AVOID any serious pressure on the top of epoxy and lead.



HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Canng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.


TEL:+886-4-26393976 FAX:+886-4-26393125

ELECTRIC-OPTICAL CHARACTERISTICS

TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Angle of Half Sensitive	2θ _{1/2}			30		deg
Collector-Emitter Voltage	V _{ceo}	I _c =1mA, E _e =0mw/cm ²	30			V
Emitter-Collector Voltage	V _{eco}	I _c =100 μA, E _e =0mw/cm ²		5		v
Collector-Emitter Saturation Voltage	V _{ces}	I _c =0.5mA, I _b =100 μA			0.4	V
Collector Current (Saturation)	I _c	V _{ce} =5V, E _e =0.5mw/cm ²	0.8	3.0	1.2	mA
Collector Dark Current	I _{ceo}	V _{ce} =20V, E _e =0mw/cm ²			100	nA
Ries Time	T _r	V _{ce} =5V, I _c =1mA, RL=1000Ω		15		μS
Fall Time	T _f			15		μS
Peak Wavelength	λ _p			900		nm
Sensitivity Wavelength	λ		500		1100	nm

*1.The dominate wavelength , λ_d, is derived from the CIE Chromaticity Diagram and represents the color of the device.








HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Canng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

TYPICAL ELECTRICAL OPTICAL CHARACTERISTICS CURVES

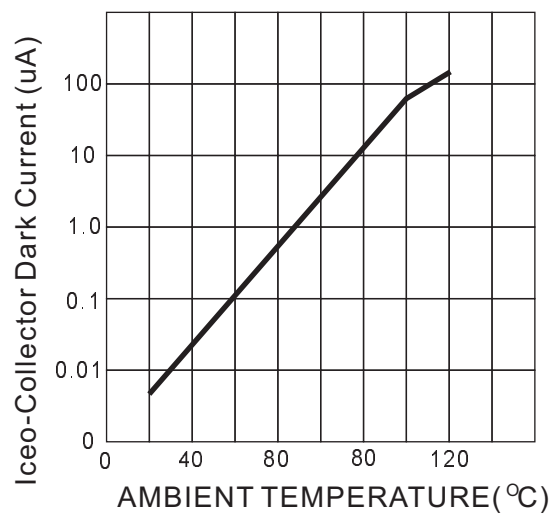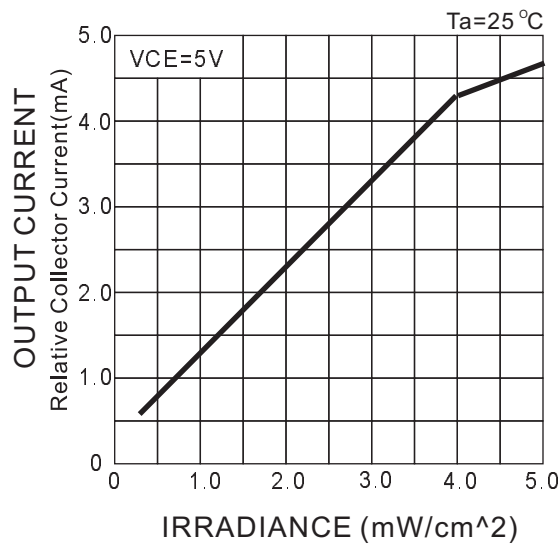
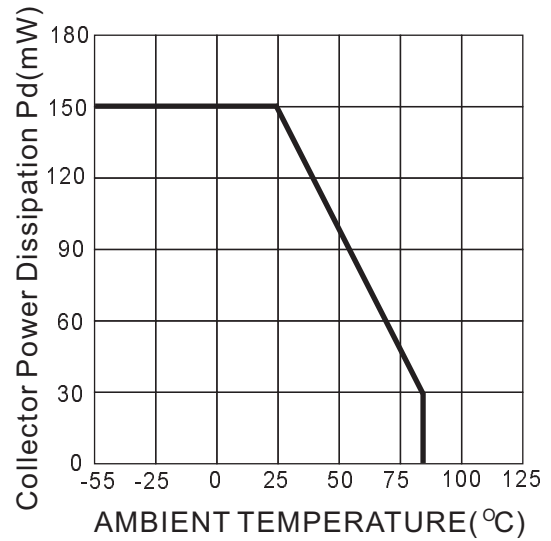
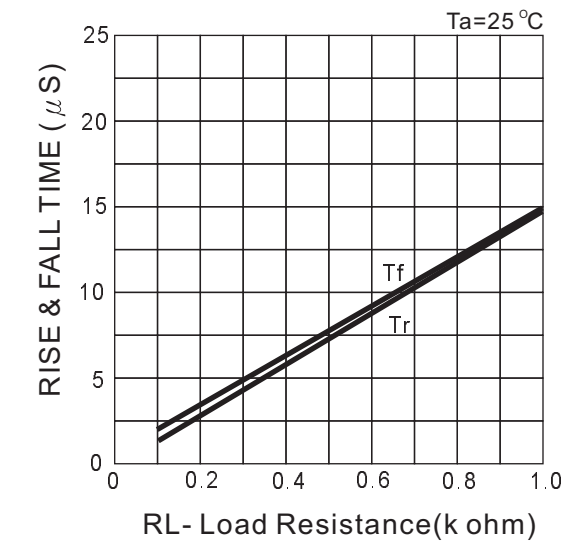


HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Canng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

TYPICAL ELECTRICAL OPTICAL CHARACTERISTICS CURVES

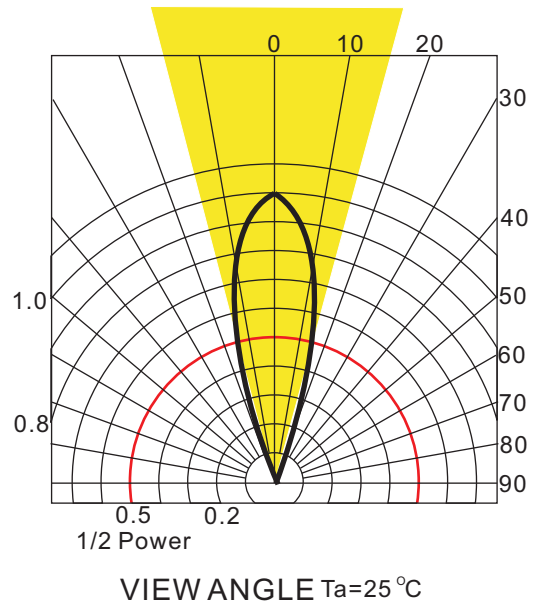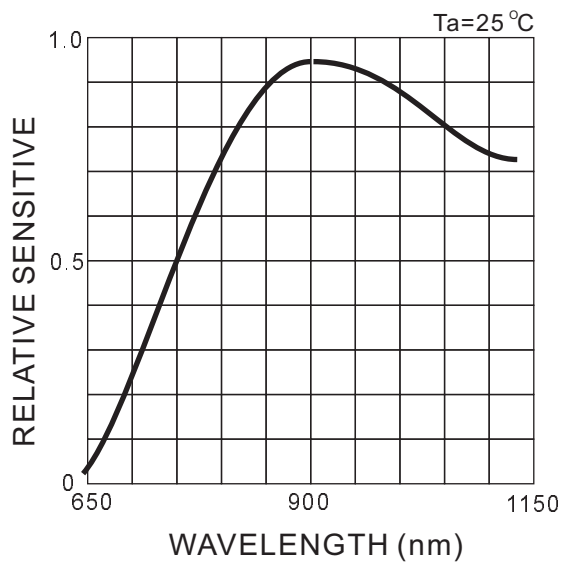

HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Canng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125